

Armed Services Technical Information Agency

Because of our limited supply, you are requested to return this copy WHEN IT HAS SERVED YOUR PURPOSE so that it may be made available to other requesters. Your cooperation will be appreciated.

AD

28906

NOTICE: WHEN GOVERNMENT OR OTHER DRAWINGS, SPECIFICATIONS OR OTHER DATA ARE USED FOR ANY PURPOSE OTHER THAN IN CONNECTION WITH A DEFINITELY RELATED GOVERNMENT PROCUREMENT OPERATION, THE U. S. GOVERNMENT THEREBY INCURS NO RESPONSIBILITY, NOR ANY OBLIGATION WHATSOEVER; AND THE FACT THAT THE GOVERNMENT MAY HAVE FORMULATED, FURNISHED, OR IN ANY WAY SUPPLIED THE SAID DRAWINGS, SPECIFICATIONS, OR OTHER DATA IS NOT TO BE REGARDED BY IMPLICATION OR OTHERWISE AS IN ANY MANNER LICENSING THE HOLDER OR ANY OTHER PERSON OR CORPORATION, OR CONVEYING ANY RIGHTS OR PERMISSION TO MANUFACTURE, USE OR SELL ANY PATENTED INVENTION THAT MAY IN ANY WAY BE RELATED THERETO.

Reproduced by
DOCUMENT SERVICE CENTER
KNOTT BUILDING, DAYTON, 2, OHIO

CONFIDENTIAL

ED No. 28906

FILE COPY

CONFIDENTIAL

NR-238-001
Contract Nonr-609(02)

Edwards Street Laboratory
Yale University
New Haven, Connecticut

ESL Technical Memorandum No. 28
(ESL 521: Ser 07)
12 February 1954

This document has been reviewed in accordance with
OPNAVINST 5510.17, paragraph 5. The security
classification assigned hereto is correct.

Date: 4/1/54 *[Signature]*
By direction of
Chief of Naval Research (Code 442)

Survey of the Magnetic Field at the
Surface Due to an Underwater Electrode
System Fed at 30 Cycles per Second

G. F. Pieper, R. P. Whorf,
A. H. Davis, and R. W. Jackson

CONFIDENTIAL

544A-22307 Copy #13

This document contains information affecting
the National defense of the United States
within the meaning of the Espionage Laws,
Title 18, U.S.C. , Sections 793 and 794. Its
transmission or the revelation of its contents
in any manner to an unauthorized person is
prohibited by law.

NR-238-001
Contract Nonr-609(02)

Edwards Street Laboratory
Yale University
New Haven, Connecticut

ESL Technical Memorandum No. 28
(ESL 521: Ser 07)
12 February 1954

Survey of the Magnetic Field at the
Surface Due to an Underwater Electrode
System Fed at 30 Cycles per Second

G. F. Pieper, R. P. Whorf,
A. H. Davis, and R. W. Jackson

Technical Memoranda are issued as informal internal memoranda on matters of limited interest to give preliminary or interim information which may later be embodied in a more formal report by this Laboratory. They do not necessarily represent the final views of the project nor are they to be regarded as definitive.

CONFIDENTIAL

CONFIDENTIAL

-1-

1. Introduction

During the spring of 1953 a system of electrical components was placed underwater in the approximate center of the West Passage of Narragansett Bay roughly due west of Prospect Hill on Conanicut Island. This system consisted of a feeder cable running from a hut at Fort Getty to the primary of a submerged impedance matching transformer, the transformer, insulated cables from the secondary of the transformer to electrode cables, and the electrode cables. The electrode cables were parallel, 200 meters apart, 300 meters in length, laid in about 10 to 15 meters depth of water. The details of the installation of the system and the accompanying shore installation at Fort Getty have been described previously.¹ Fig. 1 shows the approximate layout of the submerged equipment.

During the early summer of 1953, a series of measurements was made of the magnetic field just above the surface of the water due to exciting currents in the electrode cables and in the water between the electrode cables. The purpose of this report is to describe the techniques used in making these measurements and the

CONFIDENTIAL

CONFIDENTIAL

-2-

results that were obtained.

2. Apparatus and Techniques

The three components of the magnetic field were measured with properly oriented search coils. Each coil consisted of 215 turns of No. 28 single cotenamel wire wound on a square frame one foot on a side. At the operating frequency of 30 c/s (used throughout the measurements) the Emf developed by the search coil in microvolts was equal to 3.75 times the magnitude of the magnetic field component in gammas. The search coils were attached to 2 x 4 inch spars that were rigidly mounted on the stern of a naval Torpedo Retriever boat. The coil used to measure the vertical component was rigidly fixed to its spar. The two coils used to measure the two horizontal components were mounted together in such a way that they could be rotated around a vertical axis by an operator in the boat. A sighting device was located at the operator's position by which he sighted on some convenient object on the distant shore. By keeping the sighting device lined up with the chosen object, the operator then maintained a fixed orientation of the search coils with respect to

CONFIDENTIAL

CONFIDENTIAL

-3-

the underwater cables, regardless of changes in the direction of motion of the boat. The search coil apparatus is shown in the photographs, Figures 2, 3.

Signals from a search coil were presented at the input terminals of a high gain narrow bandwidth amplifier. The amplifier is described in detail in Technical Memorandum 29 (Reference 2). Briefly, the amplifier contained a logarithmic detector and an output circuit designed to feed a 0-1 milliamperes D-C Esterline Angus recording milliammeter. At full sensitivity, 5 microvolts r.m.s. at 30 c/s was sufficient to cause full scale deflection of the pen on the recording milliammeter. The full bandwidth at 1/2 voltage points was about 25 c/s, with a deep notch at 60 c/s to reduce interference from power line frequencies. The logarithmic detector operated over a range of about 1 to 500; 3 cycle semilog paper was used with the recorder.

Customarily, two amplifiers, an appropriate power supply, storage batteries, and two recording milliammeters were carried on board the Retriever. Their arrangement is shown in Fig. 4.

CONFIDENTIAL

CONFIDENTIAL

-4-

The accurate field plots were made with the help of surveyors at Fort Getty and Prospect Hill to establish the position of the boat. During a run the boat was piloted back and forth through the area over the electrode system. At 30 second intervals a mark number was transmitted by VHF radio to the surveyors and to the boat. At the instant "mark", each surveyor on shore recorded the angular position of the boat, and an operator on the boat pressed a button to insert in the margin of each Esterline Angus chart record, by means of a second pen, a marker pip or group of pips. The course of the boat was assumed to have been straight during the 30 second intervals. The slowest speed at which the boat could maintain a reasonably straight course in spite of tidal currents and wind was about 4 knots, or about 400 feet per minute. The recording charts were run at 12 inches per minute.

The data thus obtained are presented in the form of contour plots showing lines of equal pen deflection as a function of position. The numbers given beside each line are on the basis of full scale pen deflection equals 1000 deflection units. A calibration giving the

CONFIDENTIAL

CONFIDENTIAL

-5-

equivalent of each deflection unit in gamma (1 gamma = 10^{-5} gauss) is given on each plot. Frequent calibrations showed that the response of the apparatus was not always truly logarithmic. The deviations were not corrected for in the plots but the calibrations are available so that the corrections could be made at any time if desired. The absolute error introduced by this lack of correction is roughly 20% at worst; the relative error is smaller, probably less than 10%.

3. Results

The first series of runs was done without surveyors simply to check out the system. A difficulty was apparent immediately in that no signal was obtained from the crossing of the East electrode cable, while one was apparent from crossing of the West electrode cable. Further localizing measurements indicated that the trouble might be caused by a break in the insulated cable between the transformer secondary and the East electrode cable about 60 yards from the transformer. A diver went down at this place and found that this was indeed the trouble. The cable ends were grappled for, brought up, and spliced and no further difficulty of this

CONFIDENTIAL

sort was encountered. It might be pointed out that the break must have occurred during the laying of the cable, since the report of the sub-contractor who installed the cable¹ states that the load power factor was measured to be 0.61. This same power factor was measured in the runs referred to above before the break had been repaired, whereas a power factor of essentially unity was obtained after the splice of the broken cable.

The parallel straight lines on the plots show where the electrodes were thought to be, from the original plans and from transit observations during the laying. The point marked in the upper part of each plot marks the location of the matching transformer. The plots indicate clearly some deviation of the electrode cables from the assumed positions. Otherwise the plots show the magnetic field distribution quite reasonably symmetrical, and qualitatively of the shape one might expect from rather elementary D-C considerations.

G. F. Pieper
G. F. Pieper

R. P. Whorf
R. P. Whorf

A. H. Davis
A. H. Davis

R. W. Jackson
R. W. Jackson

CONFIDENTIAL

-7-

References

1. Roberts and Linden. "Report of Project Arlington"
May 26, 1953.
2. Pieper, G. F. and Jackson, R. W. "Apparatus for
Survey of a Magnetic Field Pattern at the Ocean
Surface Established by Equipment Operating at
30 Cycles per Second on the Ocean Bottom."
Technical Memorandum, No. 29, dated 12 February 1954,
Edwards Street Laboratory, Yale University.

CONFIDENTIAL

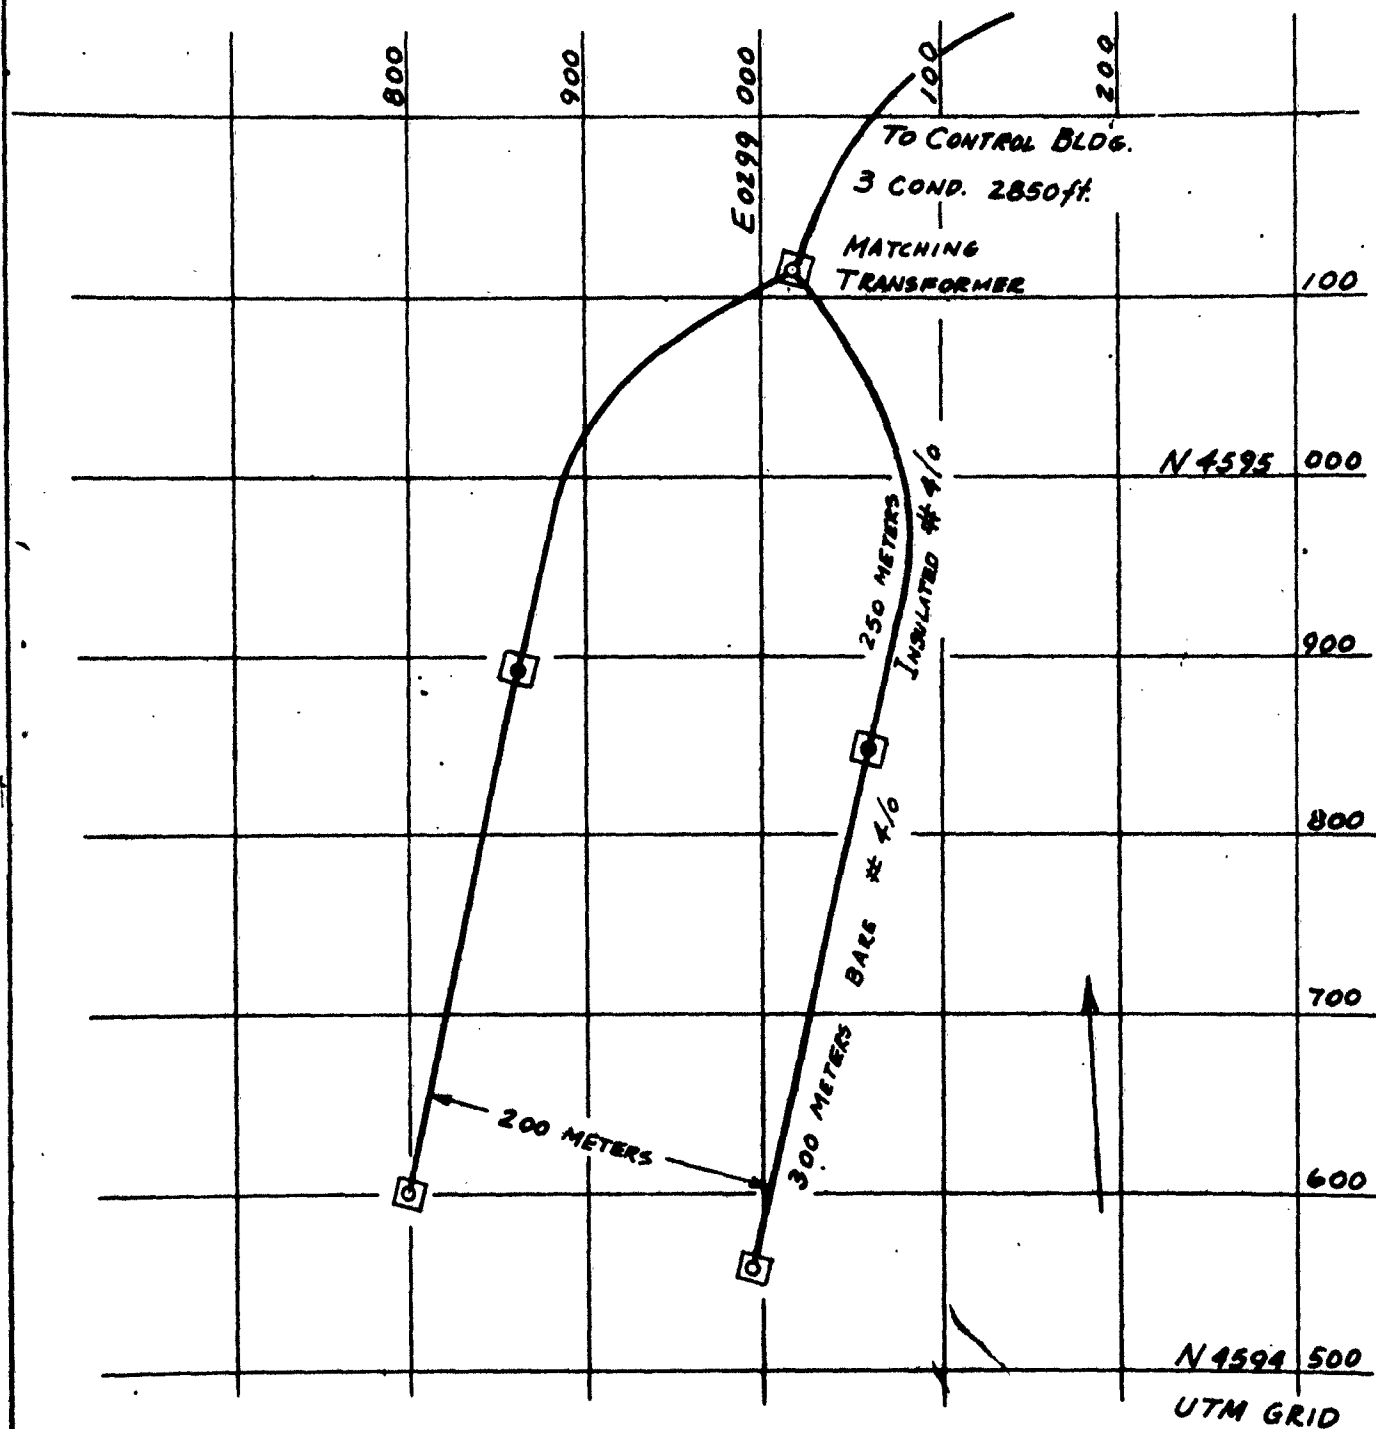


FIG. 1. LAYOUT OF SUBMERGED ELECTRODE SYSTEM

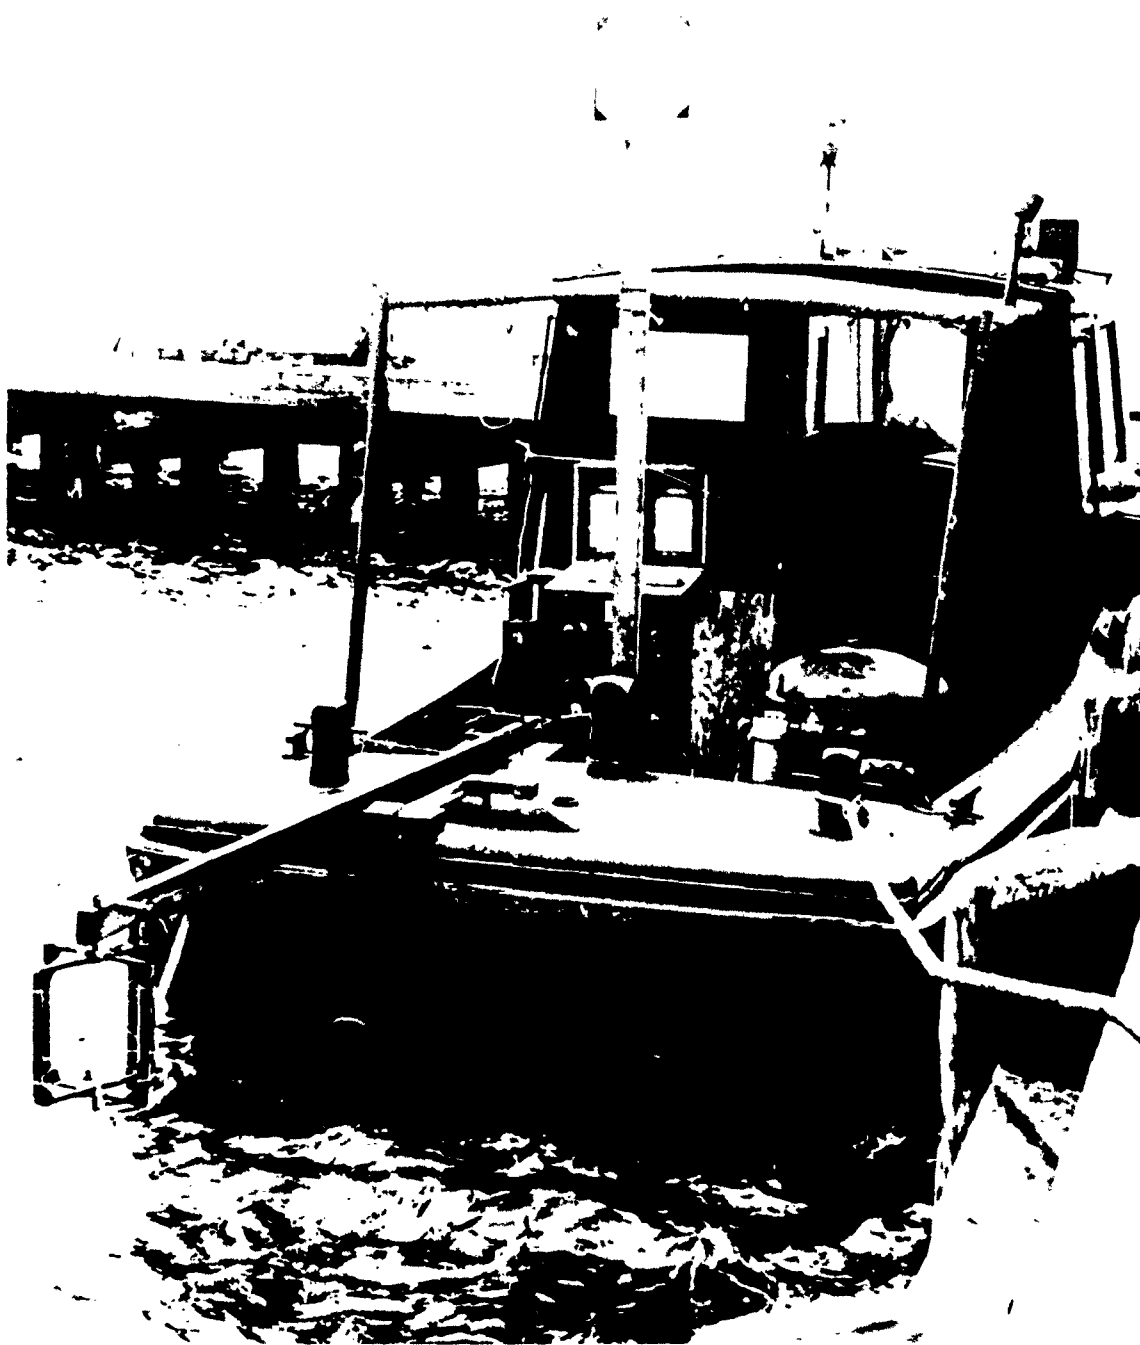


FIG. 2. FIELD SURVEY APPARATUS MOUNTED IN RETRIEVER, SHOWING COILS FOR HORIZONTAL COMPONENTS IN POSITION FOR MEASUREMENT, COIL FOR VERTICAL COMPONENT LASHED IN STOWAGE POSITION.



FIG. 3.
HORIZ. COMP'T
COIL SIGHTING
DEVICE IN USE


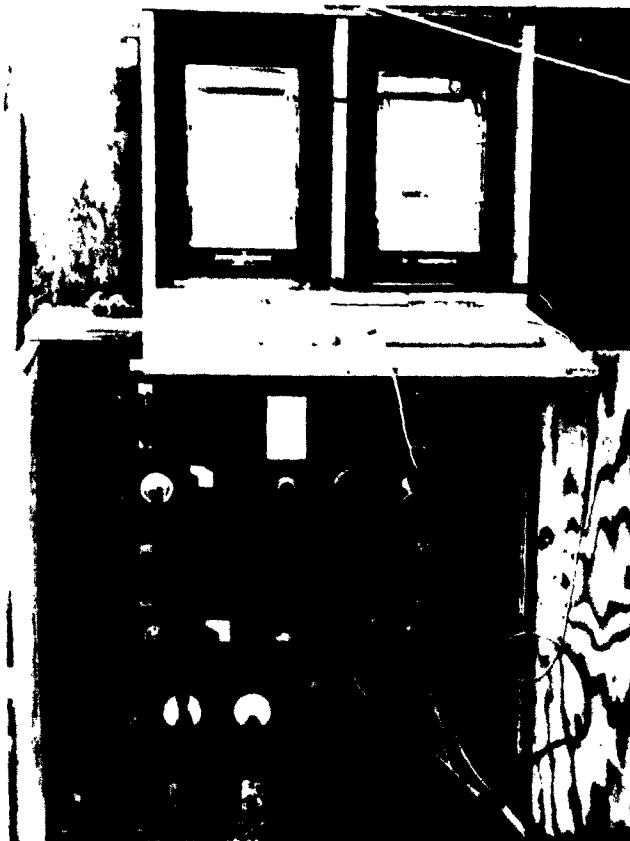


FIG. 4.
AMPLIFYING
& RECORDING
EQUIPMENT

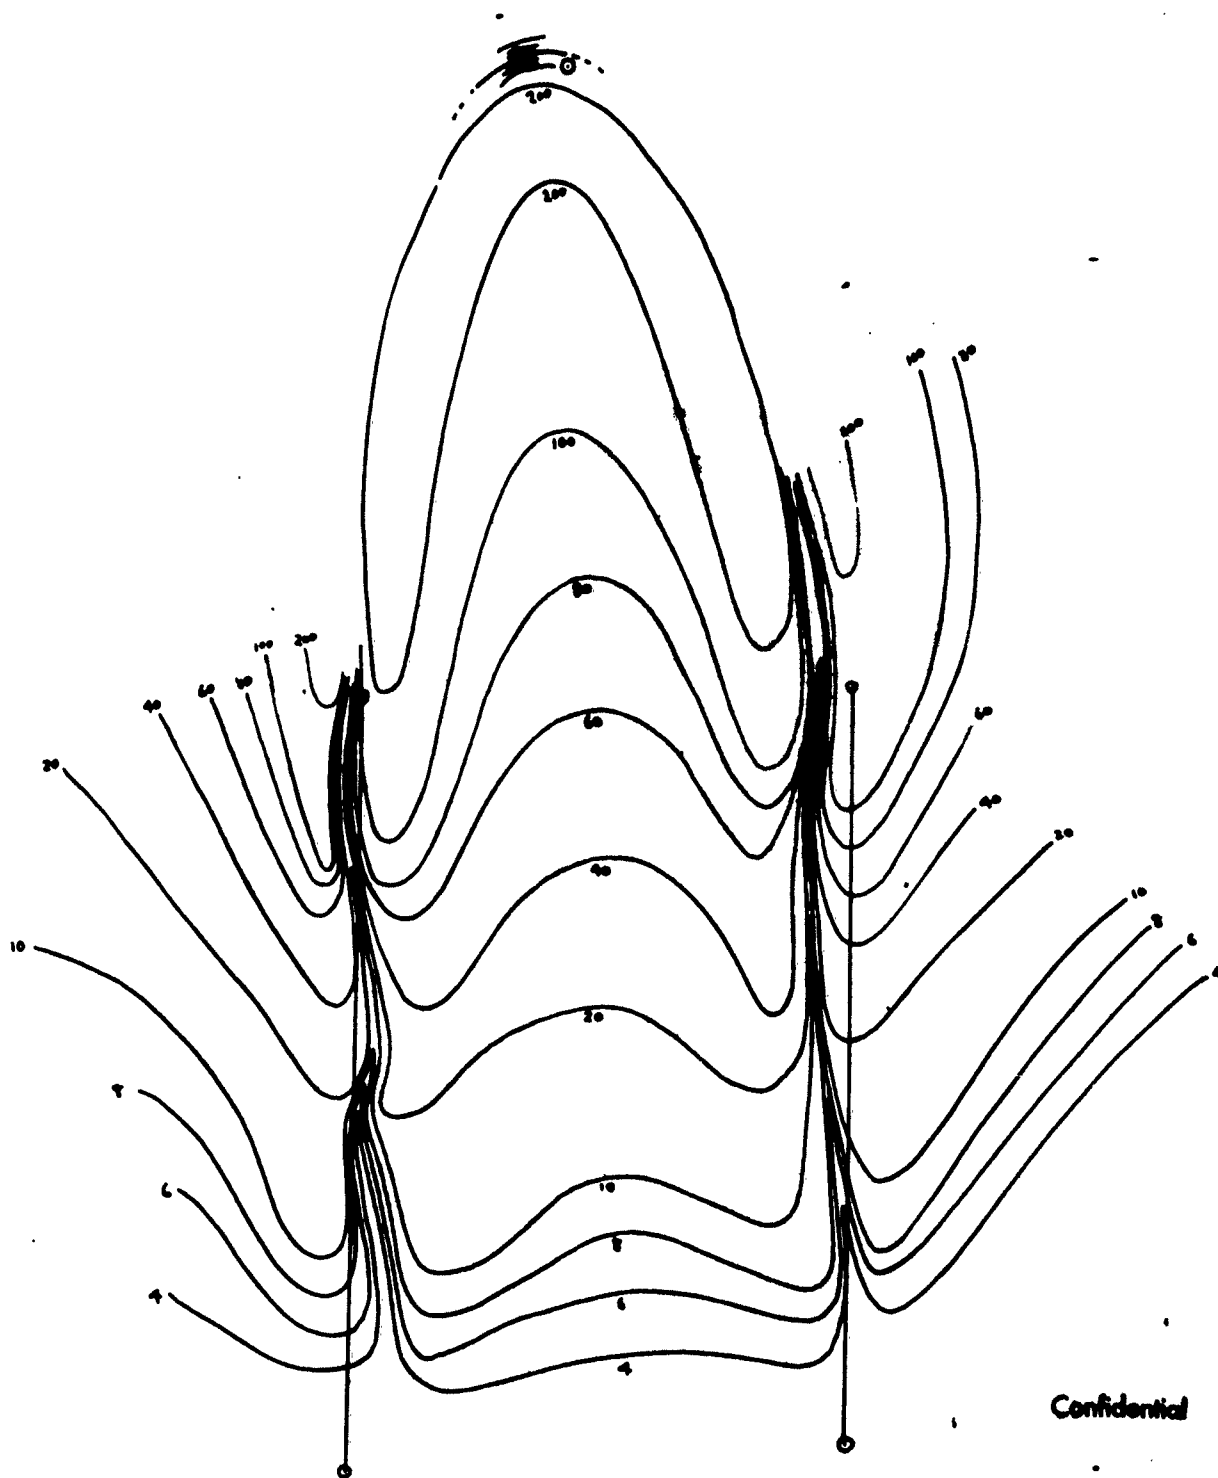


VERTICAL FIELD

Confidential

OPERATION 118
29 JUNE 1953
R.P.W.hof

FIG. 5.1 UNIT = 0.16 Y

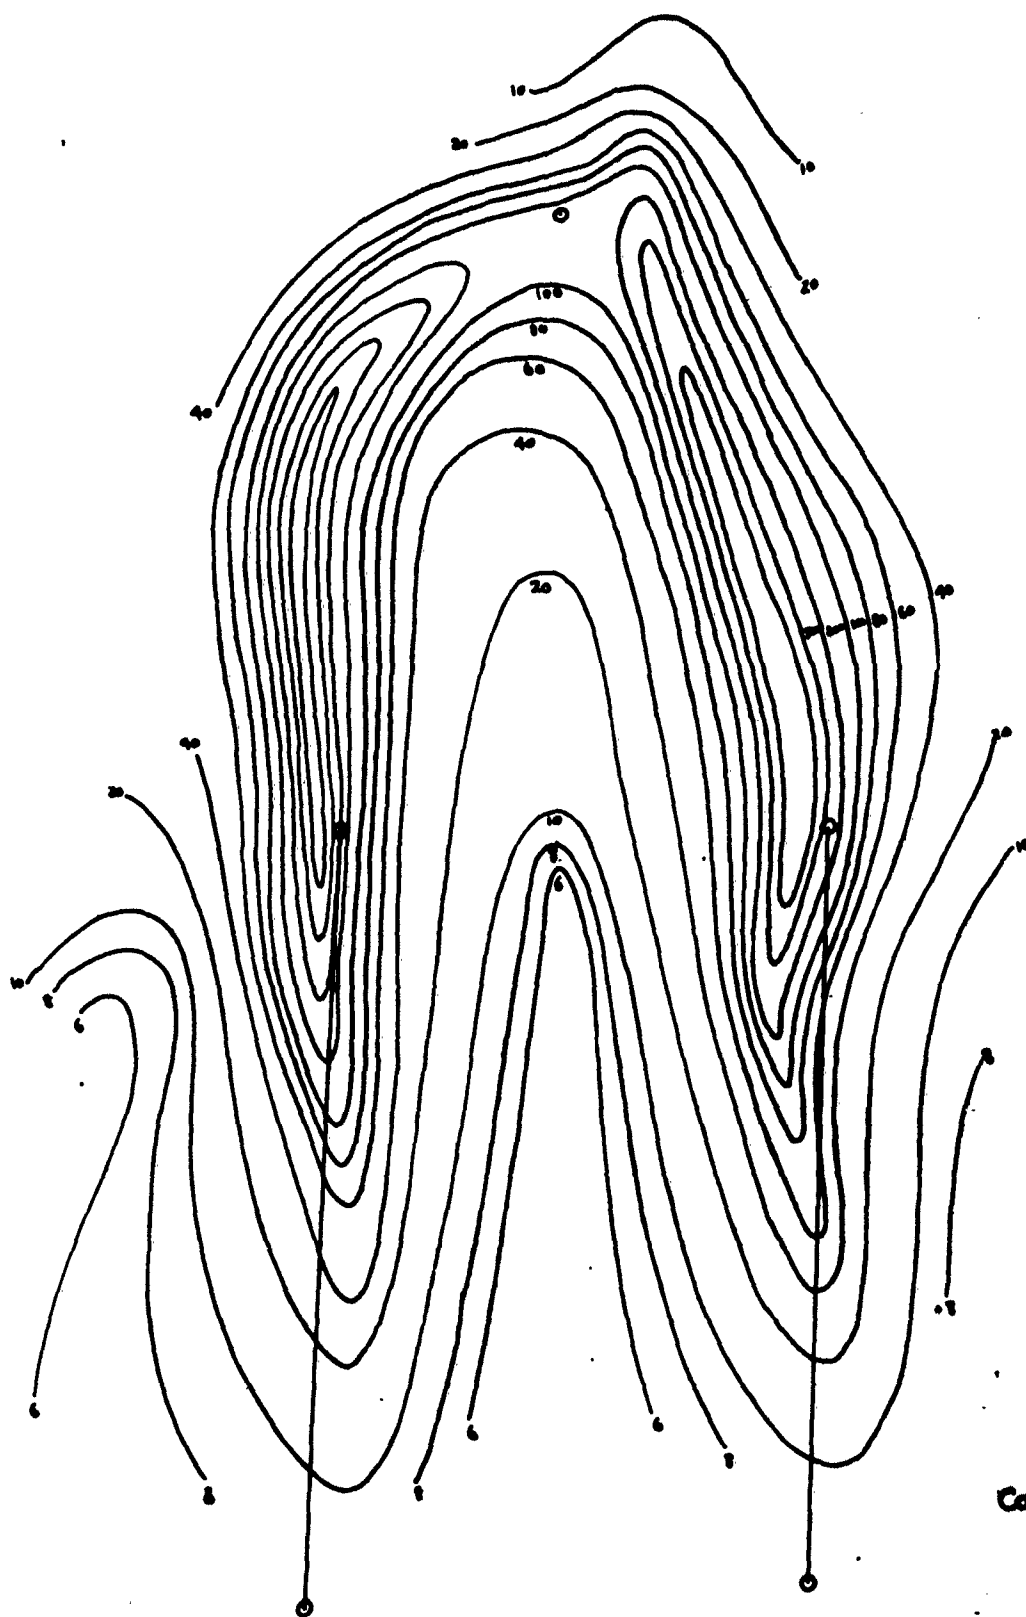

Confidential

HORIZONTAL FIELD
E-W COMPONENT

OPERATION 118
6 JULY 1953
R.P.W.

FIG. 6. 1 UNIT = 0.118




Confidential

HORIZONTAL FIELD
N-S COMPONENT

OPERATION 118
6 JULY 1953
R.F. Whorf

FIG. 7. 1 UNIT = 0.118

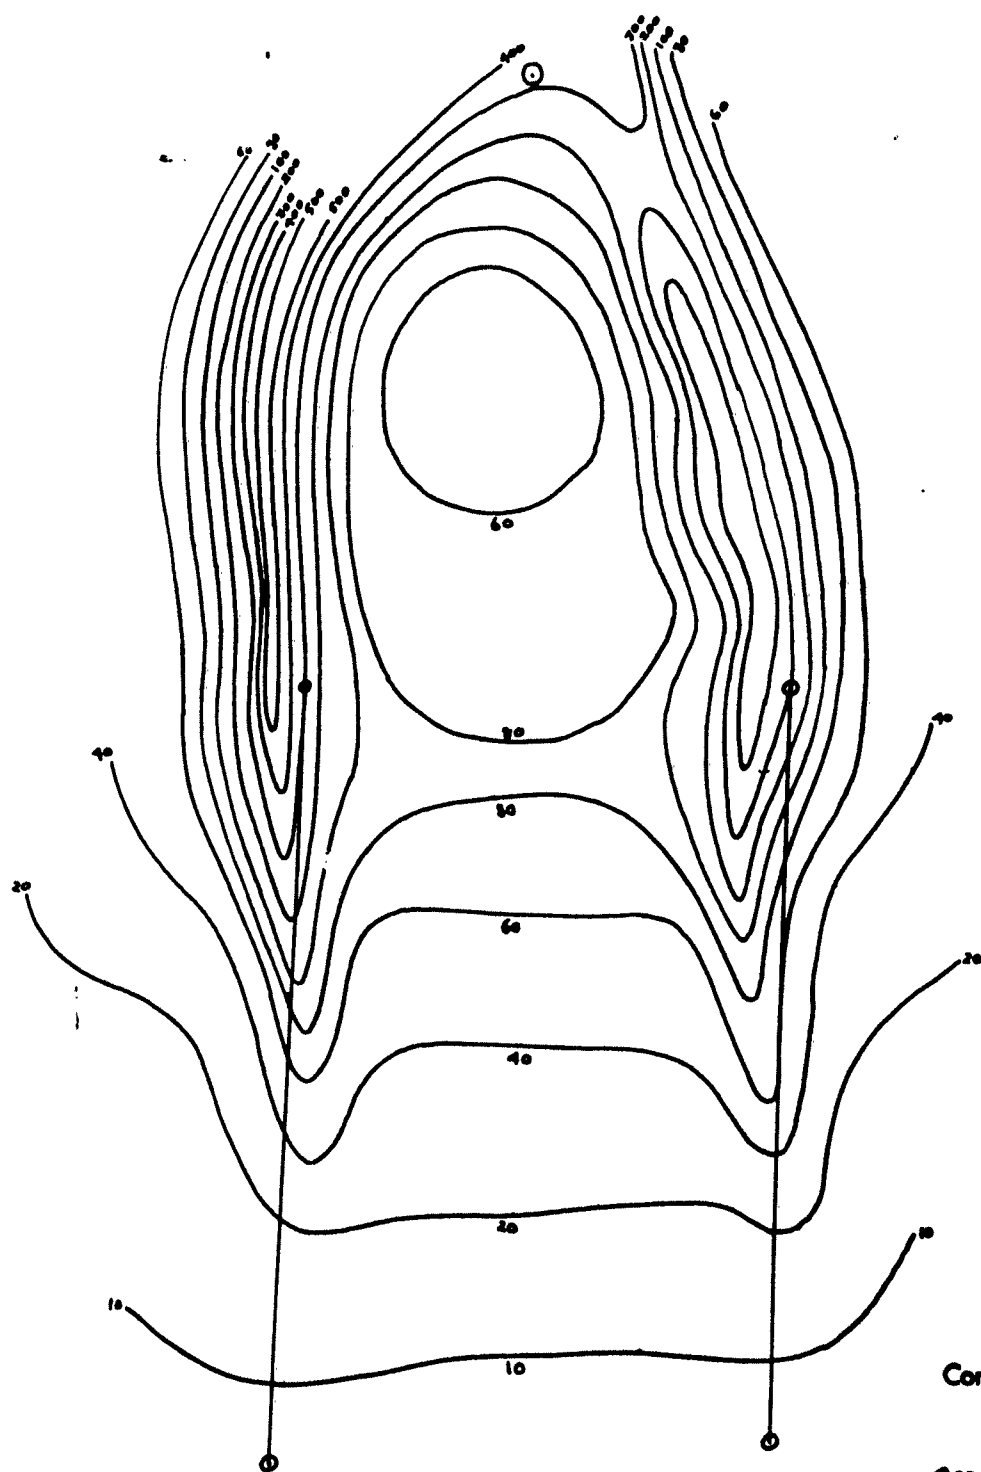

TOTAL HORIZONTAL FIELD

Confidential

OPERATION 117
6 July 1953
R.P. Whorf

FIG. 8. 1 UNIT = 0.11 γ